

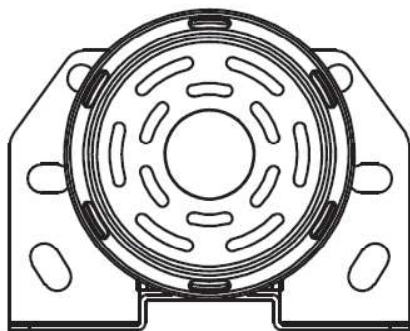


DIMENSIONAL DRAWING

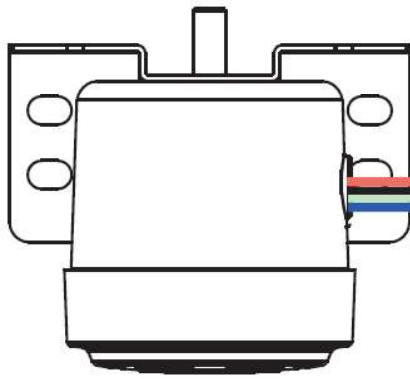

1. Red: Power(12V/24V)
2. Black: GND
- 3.Green: Reversing alarm trigger
- 4.Blue: Night Mode

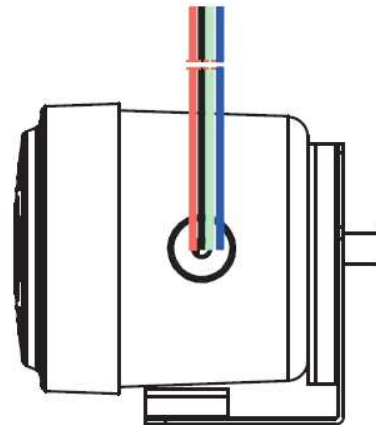

INSTRUCTIONS

Connect the Red Wire to a positive (+VE) feed on the vehicle. Connect the Black Wire to Earth (-VE). The Green Wire is to be connected to the Reverse Live Signal. When the Reverse gear is applied the signal sent to speaker via the Green Wire will trigger the speaker to sound. The speaker will sound for as long as the reverse gear is engaged. To enable the night silent feature connect the Blue Wire to the sidelights on the vehicle. When the sidelights are on the speaker will not sound if in reverse.

SPECIFICATION

Type.....	Reversing Talking Speaker
Voltage.....	12/24VDC (9-32VDC)
Power.....	3W
Current Draw.....	0.25A @ 12VDC
Speaker Output.....	97dB
IP Rating.....	IP66
Flying Leads.....	350mm
Weight.....	0.5KG (Speaker), 0.11KG (Metal Bracket)
Vibration.....	5G
Operating temperature.....	-20°C ~ +70°C
Dimensions.....	Please see above diagram
Certificates.....	CE, E Marked EMC R10

